



Dairy Hose + accessories

Toftejorg FDA approved Dairy Hoses for Portable installation

Application

Flexible suction and delivery hose for hot and cold beverages, e.g. beer, wine, fruit juice, milk. Resistant to most vegetable and animal oils. Suitable for CIP cleaning. Work temperature: -20°C/+90°C. Brief cleaning up to +120°C.

In addition to the hose Alfa Laval offers hose saddle, cover plate and tools.

Standard design

Mandrel build rubber hose reinforced with high strength synthetic cord and 3 embedded steel helix wires.



TECHNICAL DATA

Vacuum: 90%
 Brief cleaning up to: +120°C

Pressure

Size 1½": Working Pressure 1 bar
 Size 2": Working Pressure 10 bar
 Size 1½": Bursting Pressure 30 bar
 Size 2": Bursting Pressure 30 bar

Size	ID. mm	OD. mm	Working Pressure (WP) bar	Bursting pressure (BP) bar
1½"	38	49.6	1	30
2"	50	62.6	10	30

Dimensions

Size 1½": ID 38 mm / OD 49.6 mm
 Size 2": ID 60 mm / OD 62.6 mm

PHYSICAL DATA

Materials

Tube: White NBR/SBR rubber in compliance with FDA 177:2600.
 Cover: Blue CR rubber.

Temperature


Work temperature: -20°C/+90°C.

Weight

Size 1½": 1.16 kg
 Size 2": 1.55 kg

Connections

Standard: 1½" BSP and 2" BSP Other connections are available on request.

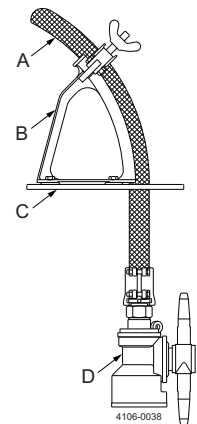

A = Dairy Hose
 B = Hose Saddle
 C = Cover Plate
 D = Tank Cleaning machine type
 TZ-66, TZ-67, TZ-75, TZ-82

4106-0038

Alfa Laval reserves the right to change specifications without prior notification. ALFA LAVAL is a trademark registered and owned by Alfa Laval Corporate AB.

ESE00253EN 1201

© Alfa Laval

How to contact Alfa Laval

Contact details for all countries are continually updated on our website. Please visit www.alfalaval.com to access the information direct.